
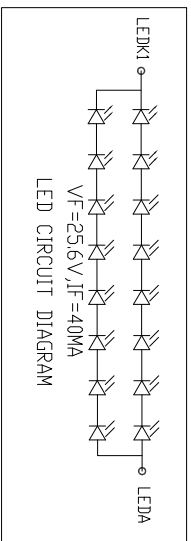
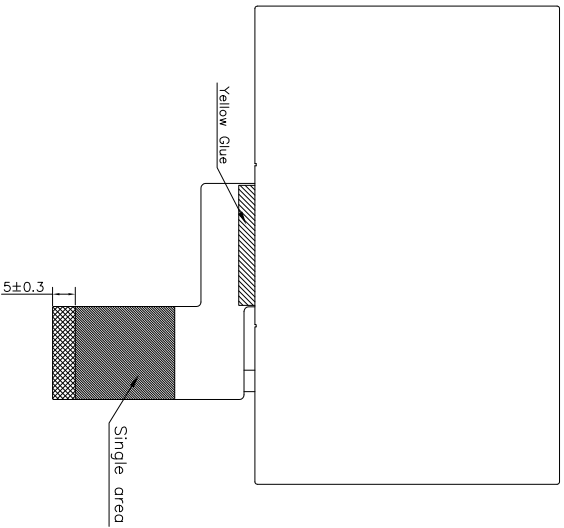
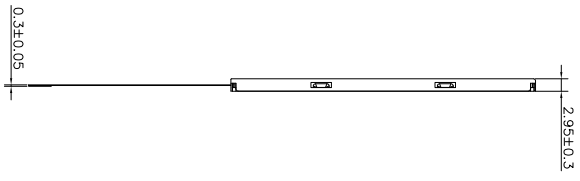


REV	DESCRIPTION	DATE
0	First Issue	

PIN	NAME	PIN	NAME
1	WLED-	21	BO
2	WLED+	22	B1
3	GND	23	B2
4	VDD	24	B3
5	RO	25	B4
6	R1	26	B5
7	R2	27	B6
8	R3	28	B7
9	R4	29	GND
10	R5	30	CLK
11	R6	31	DISP
12	R7	32	NC
13	GO	33	NC
14	G1	34	DE
15	G2	35	NC
16	G3	36	GND
17	G4	37	NC
18	G5	38	NC
19	G6	39	NC
20	G7	40	NC

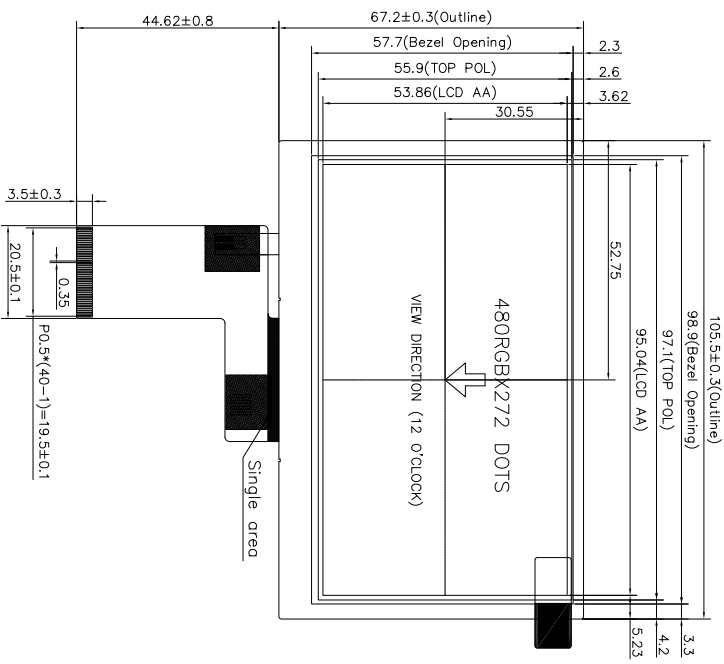

深圳市迈瑞德电子有限公司

TITLE: LCM-OUTLINE		PART NO: CP-M0043CL08-40NB-16A	
MODULE NAME: M0043CL08-40NB-16A	VER: A	REV: 0	
DRAWN BY	DATE	SCALE: N.T.S.	
CHECKED BY	DATE	UNIT: mm	
APPROVED BY	DATE	SHEET: 1/1	

- NOTES:
1. DISPLAY MODE : TFT-LCD, TRANSMISSIVE, NORMAL WHITE
 3. OPTIMAL VIEW DIRECTION: 12 O'CLOCK
 4. BACKLIGHT: 16CHIP-WHITE LED, 8S2P CONNECTION
 5. Model Luminance : 900MIN Cd/M2 1000TYP Cd/M2 (20mA/LED)
- CHROMATICITY COORDINATE:
6. OPERATING TEMPERATURE: -20° C TO 70° C
7. STORAGE TEMPERATURE: -30° C TO 80° C
8. * CRITICAL DIMENSION:
9. GENERAL TOLERANCE : ±0.2mm.